


## TLA-003012G16S



### 外形尺寸

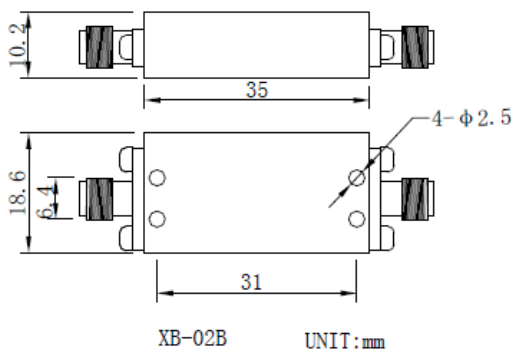

■ 频率范围	0.3~1.2GHz
■ 增益	16dB typ
■ P1dB	12dBm typ
■ 噪声系数	0.8dB @800MHz typ

### 技术指标@25°C

频率范围	0.3~1.2GHz
噪声系数	0.8dB typ 1.2dB max
增益	16dB typ
增益平坦度	±2.5dB typ ±3dB max
P1dB	12dBm typ 15dBm max
输入驻波	-10dB max
输出驻波	-10dB max
工作电压	12.0V
工作电流	100mA
外形尺寸	35x18.6x10.2mm
重量	15.9g
工作温度	-40°C ~70°C
储存温度	-40°C ~ 100°C

### 订单描述

TLA- 003012G16S

指标特性

### 测试曲线 (Temp @+25°C)

