


TLA-000100G30B



外形尺寸

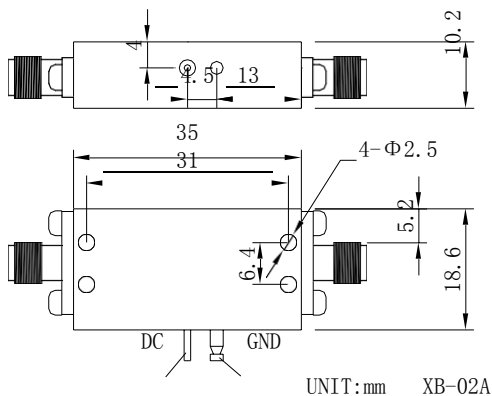

■ 频率范围	0.05-10GHz
■ 增益	30dB typ
■ P1dB	15dBm typ
■ 噪声系数	4.0dB typ

技术指标@25℃

频率范围	0.05-10GHz
增益	30dB typ
增益平坦度	±2.0dB typ
P1dB	15 dBm typ
噪声系数	4.0dB typ
输入驻波	2.5:1
输出驻波	2.5:1
电压	12.0V
电流	170mA
工作温度	-20℃ ~ 70℃
储存温度	-55℃ ~ 100℃
极限电压	13V
最大入口功率	-15dBm

订单描述

TLA-000100G30B  指标特性

测试曲线 (Temp @+25℃)

