

TLA-001030G33




■ 频率范围	100 - 3000MHz
■ 增益	33dB typ
■ P1dB	15.0dBm typ
■ 噪声系数	2.5dB typ

技术指标@25°C

频率范围	100-3000MHz
增益	33dB typ
增益平坦度	±2.0dB typ
P1dB	15.0 dBm typ
OIP3	25.0 dBm typ
噪声系数	2.5 dB
输入驻波	2.0 :1
输出驻波	2.0 :1
电压	12.0V
电流	160A
操作温度	-20°C ~ 70°C
储藏温度	-55°C ~ 100°C
极限电压	15V
最大入口功率	-13dBm

外形尺寸

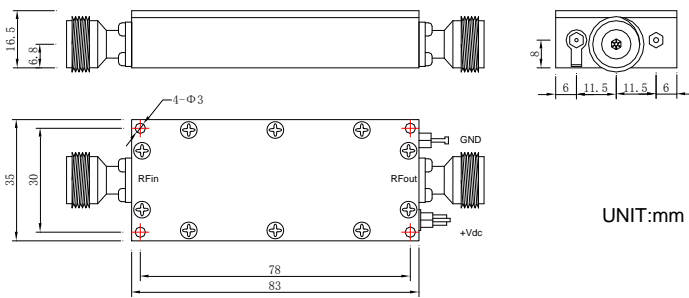

测试曲线 (Temp @+25°C)

订单描述

TLA-001030G33

指标特性

