



TLA-001040G38B





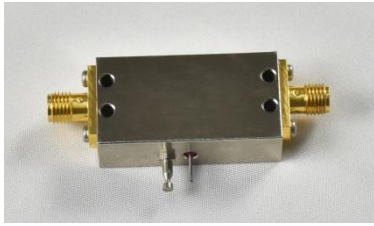


外形尺寸

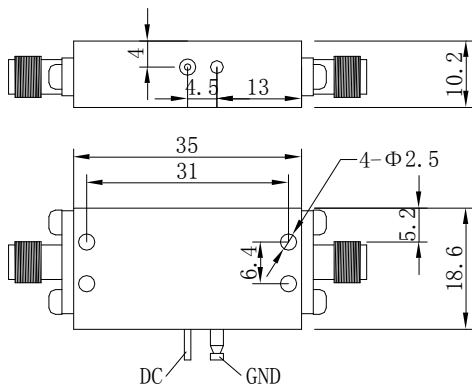

UNIT:mm XB-02A

测试曲线 (Temp @+25°C)

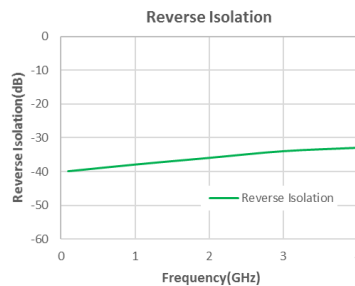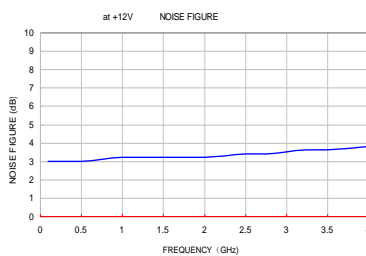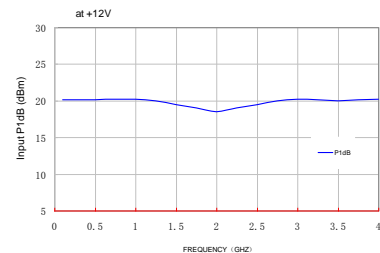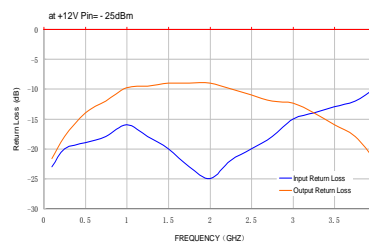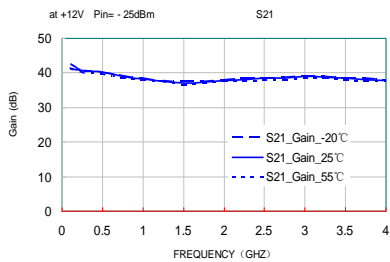

■ 频率范围	0.1-4GHz
■ 增益	38dB typ
■ P1dB	20dBm typ
■ 噪声系数	3.5dB typ

技术指标@25°C

频率范围	0.1-4GHz
增益	38dB typ
增益平坦度	±2.5 dB typ
P1dB	20 dBm typ
噪声系数	3.5 dB
输入驻波	2.0 :1
输出驻波	2.0 :1
电压	12.0V
电流	230mA
工作温度	-20°C ~ 70°C
储存温度	-55°C ~ 100°C
极限电压	13V
最大入口功率	-10dBm

订单描述

TLA-001040G38B

指标特性

