


## TLA-001120G30B



### 外形尺寸

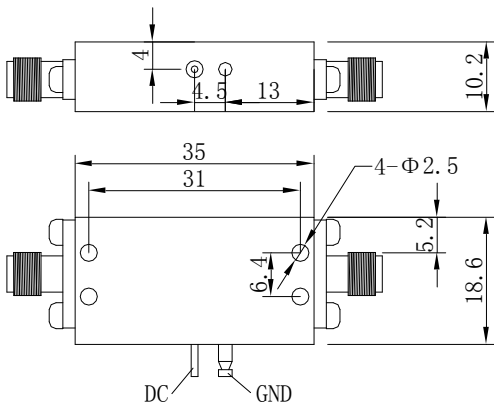


UNIT:mm XB-02A

■ 频率范围	0.1 - 12GHz
■ 增益	30dB typ
■ P1dB	15dBm typ
■ 噪声系数	2.5dB@8GHz typ

### 技术指标@25°C

频率范围	0.1-12GHz
增益	30dB typ
增益平坦度	±3dB typ
P1dB	15dBm typ
噪声系数	2.5dB@8GHz typ
输入驻波	2.5 :1
输出驻波	2.5 :1
电压	12.0V
电流	170mA
工作温度	-20°C ~ 70°C
储存温度	-55°C ~ 100°C
极限电压	13V
最大入口功率	-15dBm

### 订单描述

TLA-001120G30B  指标特性

### 测试曲线 (Temp @+25°C)

