


TLA-005200M15



外形尺寸

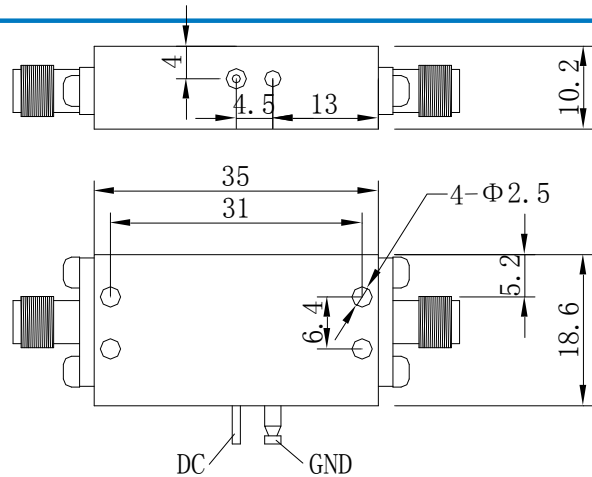

测试曲线 (Temp @+25°C)

■ 频率范围	5-200MHz
■ 增益	15dB typ
■ P1dB	16.0dBm typ
■ 噪声系数	3.0dB @ 10MHz typ

技术指标@25°C


频率范围	5-200MHz
噪声系数	3.0 dB @ 10MHz typ
增益	15dB typ
增益平坦度	±1.0 dB typ
响应时间	10.0Us
P1dB	16.0 dBm typ
OIP3	26.0dBm
输入端口驻波	1.5 :1
输出端口驻波	1.5 :1
工作电压	12.0V
工作电流	200mA
工作温度	-20°C ~ 70°C
储存温度	-55°C ~ 100°C
极限电压	15V
最大入口功率	+3dBm

订单描述


TLA-005200M15  指标特性

at +12V Pin= -20dBm


GAIN

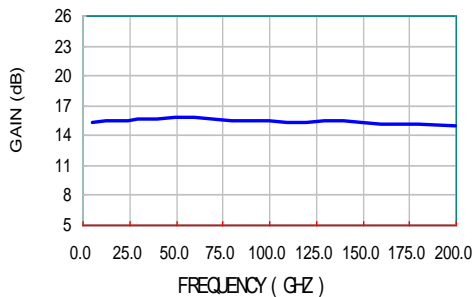


at +12V Pin= -20dBm

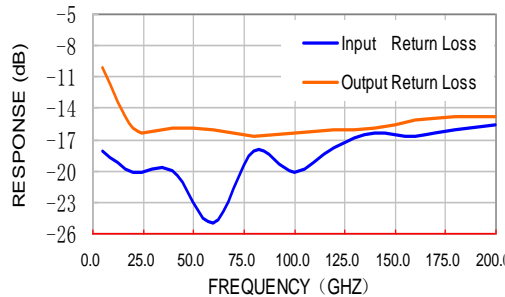


at +12V P1dB

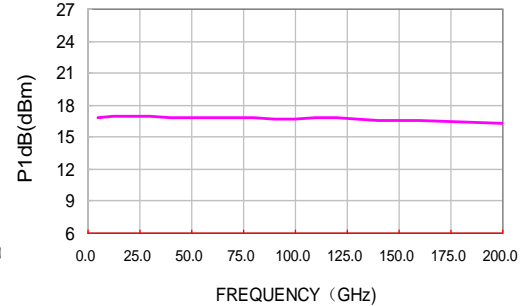

at+12V IP3

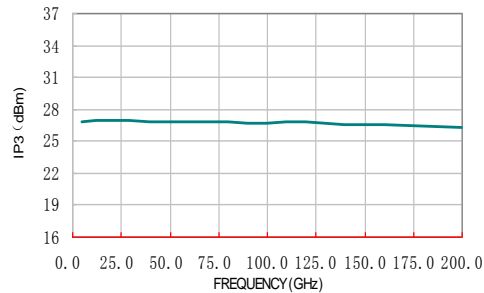

at +12V Pin= -20dBm — S12

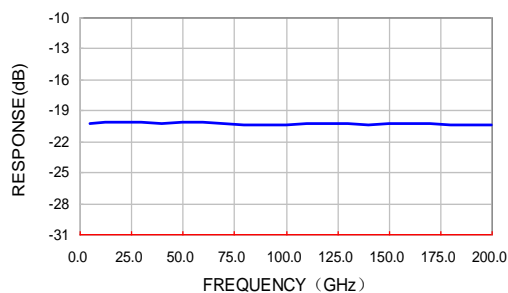

Noise Figure

