

## TLA-005200M25




■ 频率范围	5 - 200MHz
■ 增益	25.0dB typ
■ P1dB	16.0dBm typ
■ 噪声系数	3.0dB@10MHz typ

### 技术指标@25°C

频率范围	5-200MHz
噪声系数	3.0 dB@10MHz typ
增益	25.0dB typ
增益平坦度	±1.0 dB typ
响应时间	10.0Us
P1dB	16.0 dBm typ
OIP3	26.0dBm
输入端口驻波	1.5 :1
输出端口驻波	1.5 :1
工作电压	12.0V
工作电流	200mA
工作温度	-20°C ~ 70°C
储存温度	-55°C ~ 100°C
极限电压	15V
最大入口功率	-5dBm

### 外形尺寸

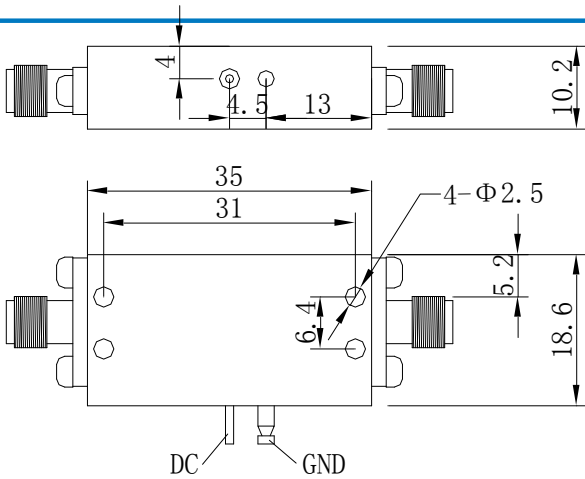

### 测试曲线 (Temp @+25°C)

### 订单描述

TLA-005200M25

指标特性

